


JR. CUZCO 492. CERCADO DE LIMA


murdochventas@gmail.com
www.murdochsistemas.com / www.murdochperu.com



PRO-LAM *PHOTO* 6 Roller **Photo** Laminator

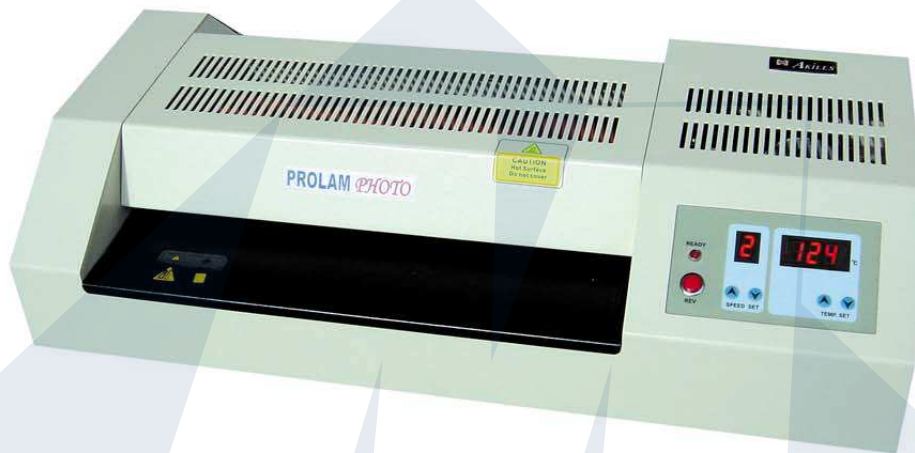

6 Roller *PHOTO* POUCH LAMINATOR

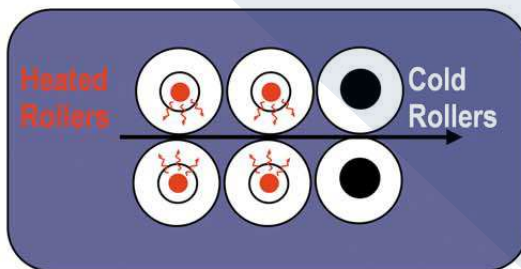

◆ PROFESSIONAL- USE


◆ EXTRA CRYSTAL-CLEAR
LAMINATION

◆ VARIABLE SPEED & TEMP

◆ PHOTO-READY

◆ LED DISPLAY

AKILES PRO-LAM PHOTO 6 Roller Photo LAMINATOR

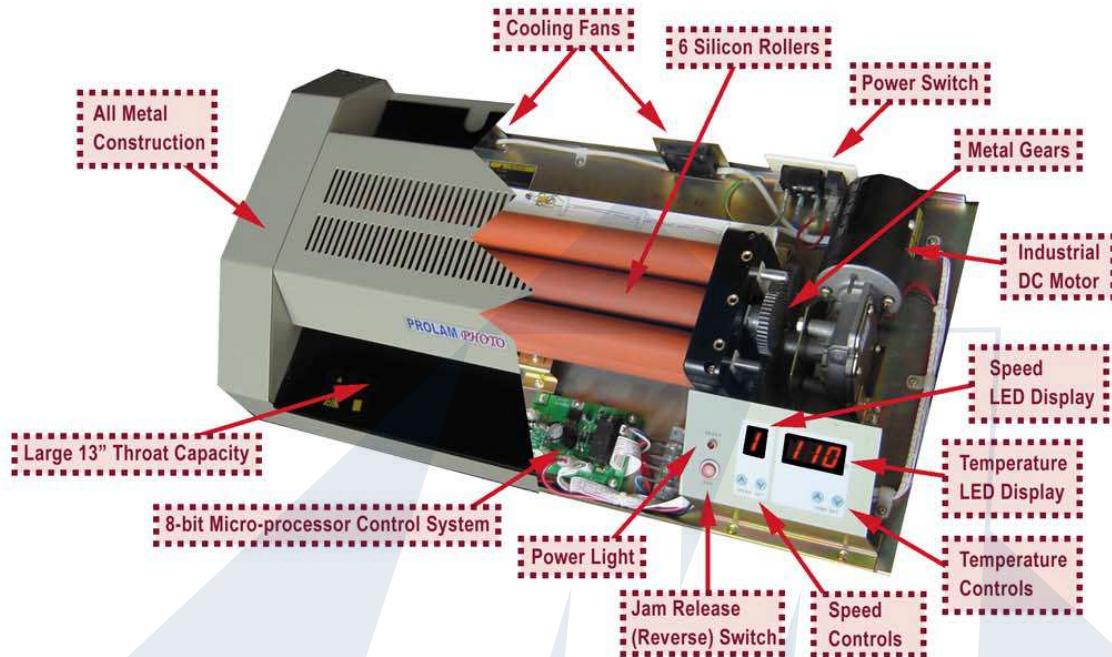

- ▶ **6 Roller Thermal System** (4 heated rollers + 2 Cold rollers) allows for a more professional, crystal-clear, bubble-free lamination finish.
- ▶ **Advanced Photo-Ready Technology** provides a balanced heat dissipation during laminating process, making it perfect for laminating photographs and other hard-to-laminate materials.
- ▶ **Variable Speed & Temperature Control Combination** allows for a fast lamination of all standard pouch thicknesses (from 3 mils up to 10 mils) with the simple press of a button (no waiting period when changing thickness).
- ▶ **Exclusive "Flex-Tite" System** allows the rollers to adjust themselves and maintain the proper laminating pressure with different material thickness. Perfect for hot foiling and mounting.
- ▶ **8-bit Micro-Processor Control System** precisely sets the exact temperature & speed for a fast, consistent and user-friendly laminating experience.
- ▶ **Energy Saving Stand-by Mode** to conserve energy and prolong the lifespan of your laminator.
- ▶ **Overheat Protection System** automatically cuts off heating power if temperature exceeds 160°C (320°F).
- ▶ **All Metal Construction** for a more professional, heavy duty look & a longer lasting lifespan.
- ▶ **Auto Memory Function** machine will remember the last speed & temperature settings before turning off, saving you the trouble of re-adjusting the settings next time you turn it on.
- ▶ **Silicon Rollers** provide the flexibility of laminating with or without a carrier.
- ▶ **Metal Gears & Industrial Motor** (1150 Watts / 12V) to guarantee strength and durability.
- ▶ **Jam Release (Reverse) Switch** allows easy corrective action for jams.
- ▶ **Cold Lamination Function**
- ▶ **CE & TUV Certified and Approved**

SPECIFICATIONS	
Throat Capacity:	330 mm (13")
Motor:	DC 12V / 1150W
Laminating Heat Range:	32 - 320°F
Maximum Pouch Thickness:	10 mils (250 Mic.)
Temperature Control:	Electronic (8-bit Micro Processor)
Laminating Speed:	Variable (12"-59"/min)
Cover:	Metal
Volume:	2.0 CbFt
Weight:	17.7 Kg (39 Lbs)
Warranty:	One year

AUTHORIZED DEALER:

